


Naturally sticky, can be directly pasted on the surface of the radiator, No adhesive backing required.

High thixotropy, non-extruding

Easy to rework

Soft at room temperature, low assembly stress

High reliability

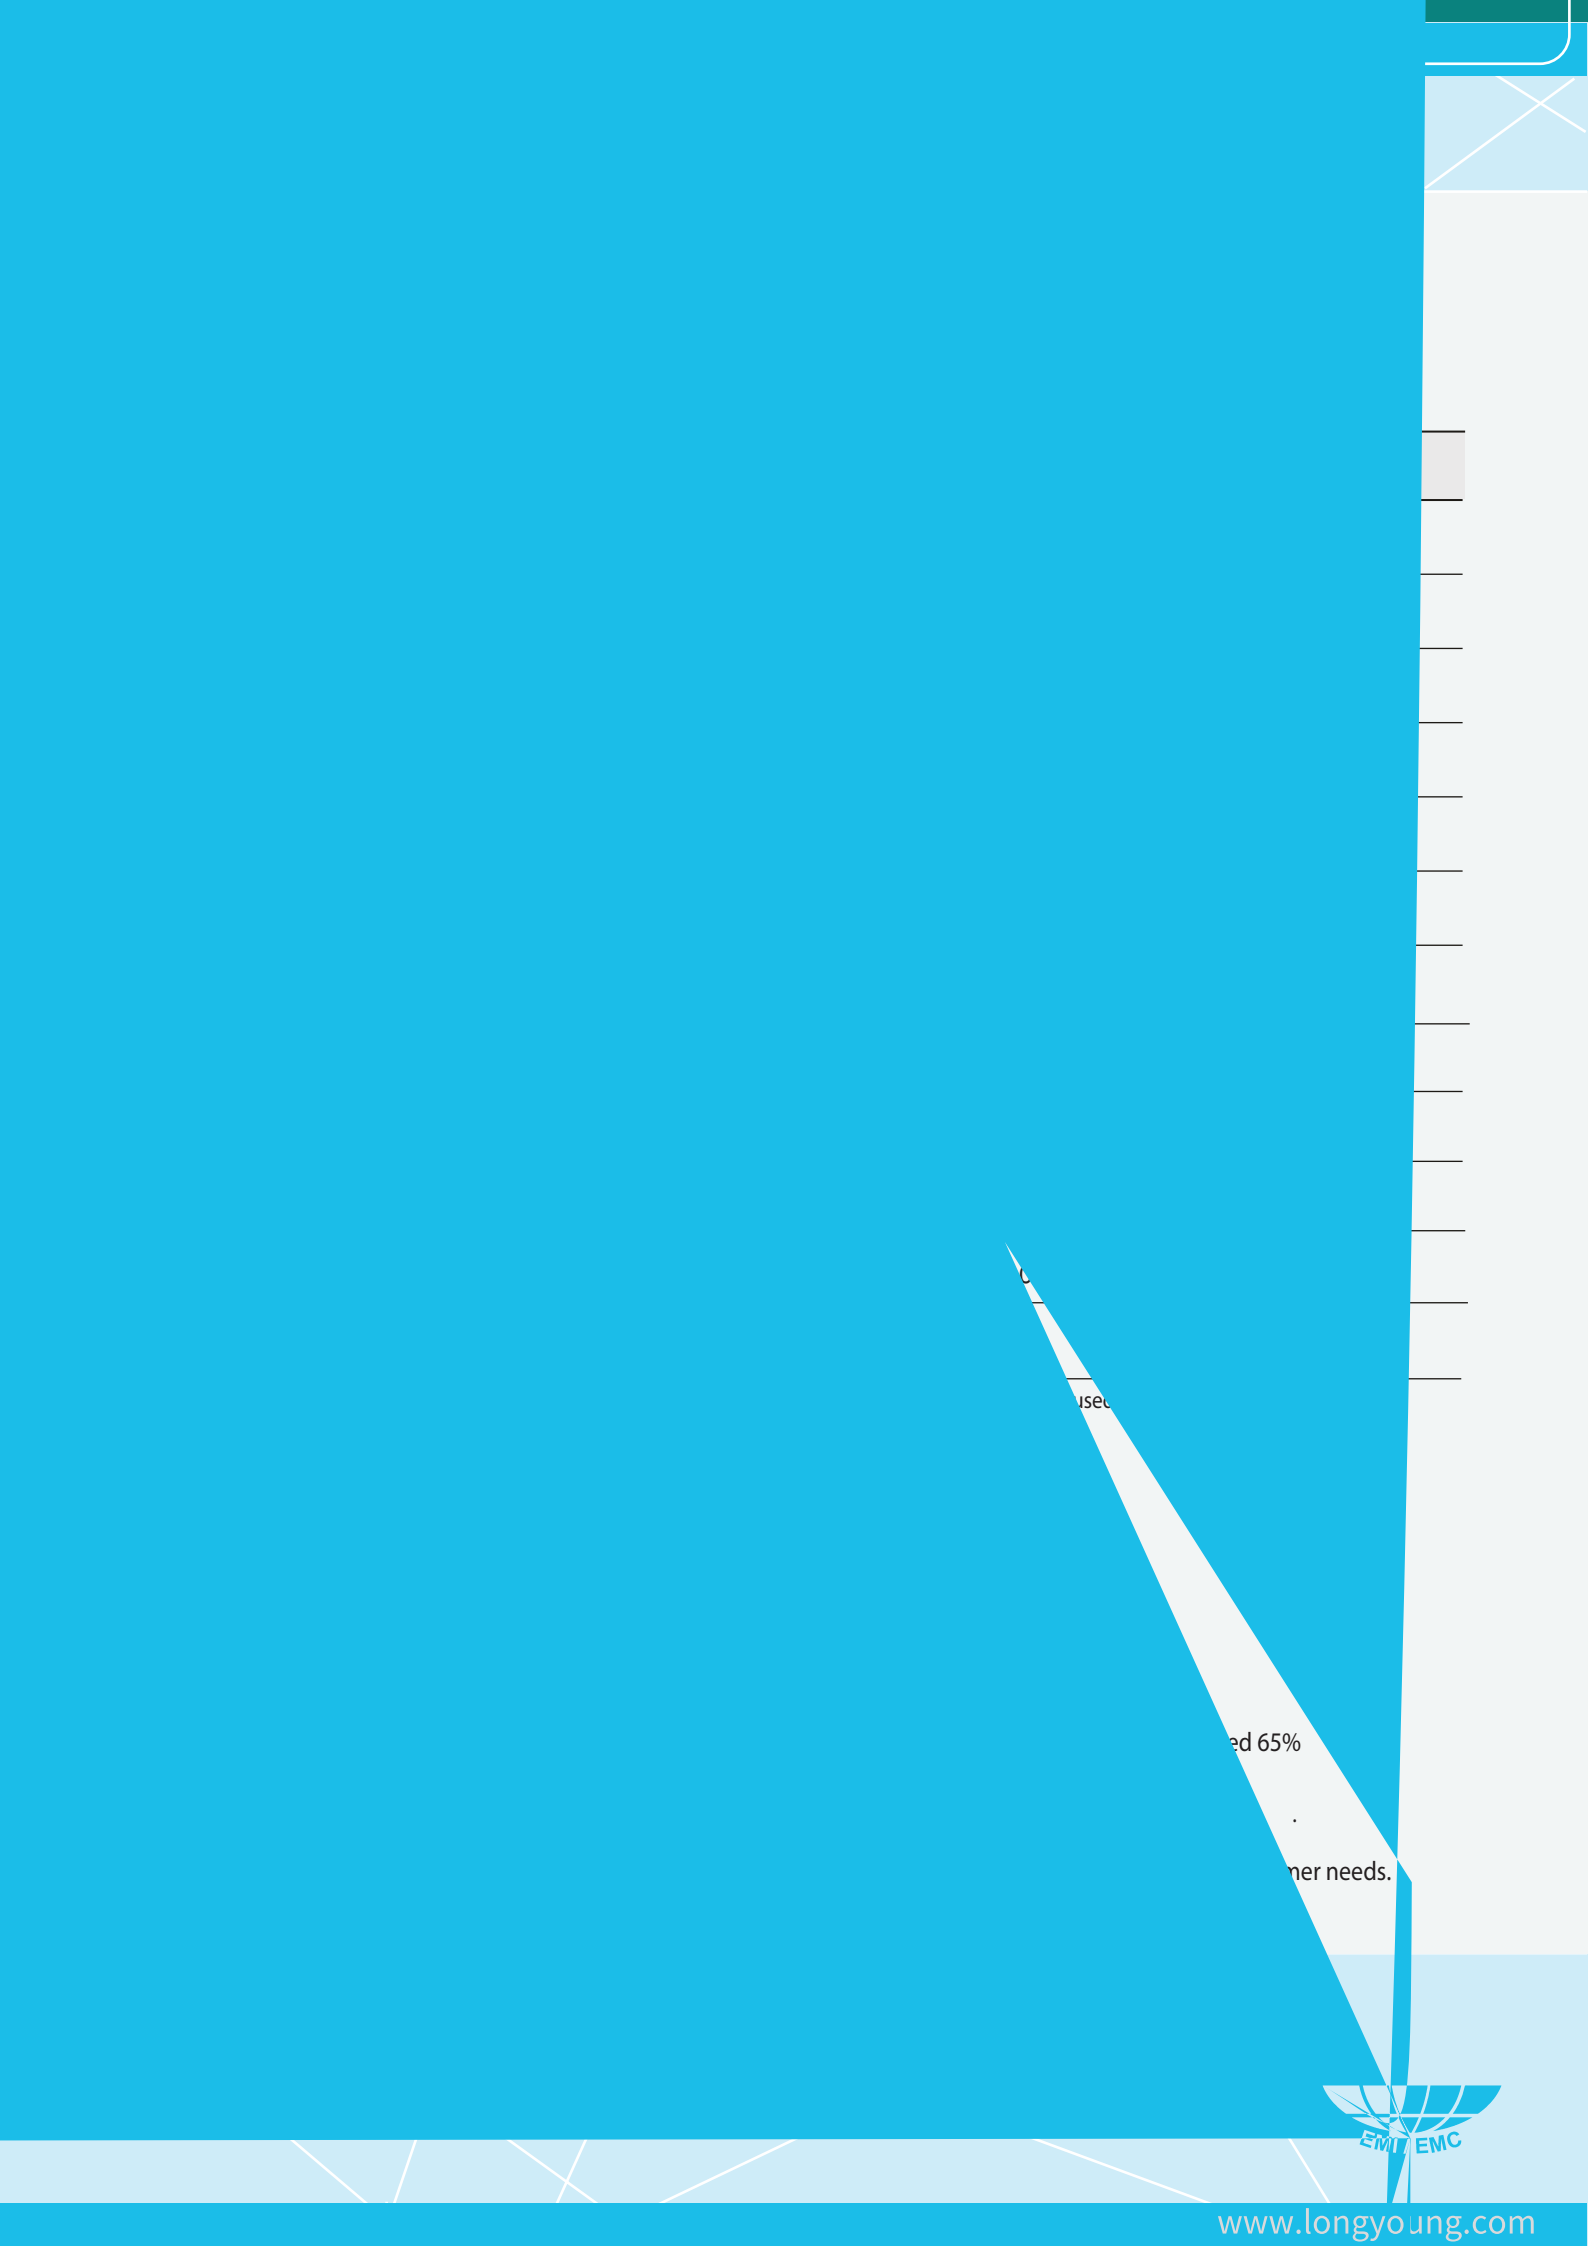

use

ed 65%

ner needs.

